

Error Detection and Correction

Exercise 1: Compute the modulo-4 checksum, C , of a frame with byte values 3, 1, and 2. What values would be transmitted in the packet? What would be the value of the sum at the receiver if there were no errors? Determine the sum if the received frame was: 3, 1, 1, C ? 3, 1, 2, 0, C ? 1, 2, 3, C ?

$$C = 3 + 1 + 2 \pmod{4} = 6 \pmod{4} = 2$$

$$\text{transmit: } 3, 1, 2, (4-2) = 3, 1, 2, 2$$

$$\text{sum: } 3 + 1 + 2 + 2 \pmod{4} = 8 \pmod{4} = 0$$

$$3 + 1 + \overset{\downarrow}{1} + 2 = 7 \pmod{4} = 1 \quad (\text{error detected})$$

$$3 + 1 + 2 + 0 + 2 = 8 \pmod{4} = 0 \quad (\text{not detected})$$

$$\underbrace{1 + 2 + 3 + 2}_{\text{re ordered}} = 8 \pmod{4} = 0 \quad (\text{not detected})$$

↖ extra zero

Exercise 2: What is a modulo-2 sum? What is the modulo-2 sum of 1, 0 and 1? What is the modulo-2 sum if the number of 1's is an even number?


modulo 2 sum = remainder after dividing sum by 2

$$1 + 0 + 1 \pmod{2} = 2 \pmod{2} = 0$$

$$2n \pmod{2} = 0$$

↖ even number

Exercise 3: A (5,3) code computes the two parity bits as: $p_0 = d_0 \oplus d_1$ and $p_1 = d_1 \oplus d_2$ where d_i is the i 'th data bit. What codeword is transmitted when the data bits are $(d_0, d_1, d_2) = (0, 0, 1)$? How many different codewords are there in the code? What are the first four codewords? In general, how many codewords are there for an (n, k) code?

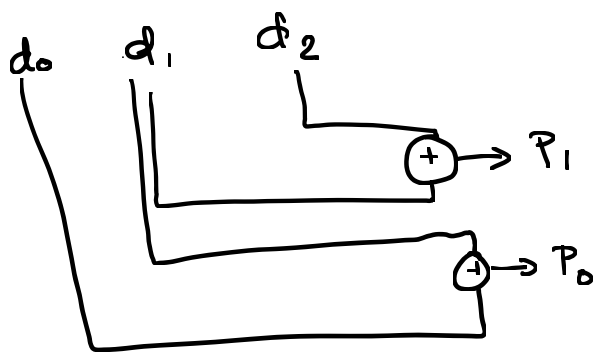

$$(0, 0, 1)$$

$$p_0 = 0 \oplus 0 = 0$$

$$p_1 = 0 \oplus 1 = 1$$

$$\text{codeword} = (0, 0, 0, 0, 1)$$

There are 2^3 codewords.

"First" four are 000, 001, 010, 011

For an (n, k) code there are 2^k codewords.

Exercise 4: What is the Hamming distance between the codewords 11100 and 11011? What is the minimum distance of a code with the four codewords 0111, 1011, 1101, 1110?

$$\begin{array}{r} 11100 \\ 11011 \\ \hline \oplus 00111 \end{array} \quad D=3$$

	0111	1011	1101	1110
0111	0	2	2	2
1011		0	2	2
1101			0	2
1110				0

$$D_{\min} = 2$$

Exercise 5: What is the code rate of a code with 4 codewords each of which is 4 bits long? *Hint: If a code has 2^k codewords, what is k ?*

$$k = 2$$

$$n = 4$$

$$\text{rate} = \frac{2}{4} \text{ or } \frac{1}{2}$$

Exercise 6: The data rate over the channel is 50 Mb/s; a rate 1/2 code is used. What is the throughput?

$$50 \text{ Mb/s} \cdot \frac{1 \text{ information bit}}{2 \text{ data bits}} = 25 \text{ Mb/s.}$$

Exercise 7: A block code has two valid codewords, 101 and 010. The receiver receives the codeword 110. What is the Hamming distance between the received codeword and each of the valid codewords? What codeword should the receiver decide was sent? What bit was most likely in error? Is it possible that the other codeword was sent?

	101	010
110	2	1

↑ receiver choose 010 because it has smallest Hamming distance from rec'd f/w.

first bit differs
∴ most likely position of error

	101	010
101	0	3
010	3	0

$d_{\min} = 3$
can detect 2 errors or less ($d-1$)

Exercise 8: What is the minimum distance for the code in the previous exercise? How many errors can be detected if you use this code? How many can be corrected? What are n , k , and the code rate (k/n)?

$$d_{\min}(d) = 3$$

$$d-1 = 2 \text{ can detect}$$

$$\left\lfloor \frac{d-1}{2} \right\rfloor = \left\lfloor \frac{3-1}{2} \right\rfloor = \lfloor 1 \rfloor = 1 \text{ can correct.}$$

$$n = 3$$

$$k = 1$$

$$\text{code rate} = \frac{k}{n} = \frac{1}{3}$$

Exercise 9: What are the units of Energy? Power? Bit Period? How can we compute the energy transmitted during one bit period from the transmit power and bit duration?

$$\text{Energy: } J(\text{oules})$$

$$\text{Power: } W$$

$$\text{Period: } s$$

$$E_b: \text{ Watts} \cdot \text{second} = \text{Joules.}$$

Exercise 10: A system needs to operate at an error rate of 10^{-3} . Without FEC it is necessary to transmit at 1W at a rate of 1 Mb/s. When a rate-1/2 code is used together with a data rate of 2 Mb/s the power required to achieve the target BER decreases to 500mW. What is the channel bit rate in each case? What is the information rate in each case? What is E_b in each case? What is the coding gain?

	W/o FEC	w/ FEC
channel bit rate	1 Mb/s	2 Mb/s
info. rate	1 Mb/s	1 Mb/s
trans. power	1	0.5 W
E_b	$1W \cdot 1\mu s = 1\mu J$	$0.5W \cdot 1\mu s = 0.5\mu J$

$$\text{Coding gain} = \frac{E_b(w_0)}{E_b(w_1)} = \frac{1\mu J}{0.5\mu J} = 2 = 3\text{dB}$$

$$= 0\text{dB} - (-3\text{dB}) = 3\text{dB}$$

Exercise 11: Assuming one bit at a time is input into the encoder in the diagram above, what are k , n , K and the code rate?

k - input bits - 1

n - o/p bits - 2

K - # possible values affecting o/p - 7

$$\text{code rate} = \frac{k}{n} = \frac{1}{2}$$

Exercise 12: Consider the encoder above. If the only the bits corresponding to the outputs A, A and B, and B are transmitted corresponding to every three input bits, what is the code rate of this punctured code?

input	bit ₀	bit ₁	bit ₂	bit ₃	...
A	A ₀	A ₁	A ₂		
B	B ₀	B ₁	B ₂		

$$\text{code rate} = \frac{\text{input bit}}{\text{o/p bits}}$$

$$= \frac{3}{4}$$

Exercise 13: A block FEC code uses values from GF(4). The 4 possible elements are represented using the letters A through D. The valid code words are: ABC, DAB, CDA, and BCD.

What is the minimum distance of this code? How many errors can be detected? Corrected?

If the codeword ADA is received, was an error made? Can it be corrected? If so, what codeword should the decoder decide was transmitted?

If each codeword represents two bits, how many bit errors were corrected?

Repeat if the codeword received was AAA.

	ABC	DAB	CDA	BCD
ABC	0	3	3	3
DAB		0	3	3
CDA			0	3
BCD				0

$$d_{min} = 3$$

can detect
can correct

$$d_{min} - 1 = 2 \text{ errors}$$

$$\left\lfloor \frac{d_{min} - 1}{2} \right\rfloor = \left\lfloor \frac{3 - 1}{2} \right\rfloor = 1 \text{ error}$$


	ABC	DAB	CDA	BCD
ADA	2	3	1	3
AAA	2	2	2	3

↑ choose

← error detected > 1 symbol error.

may have corrected 1 or 2 bits if corrected 1 symbol

Exercise 14: Give the numbering of the bits coming out of a 4x4 interleaver. If bits 8, 9 and 10 of the interleaved sequence have errors, where would the errors appear in the de-interleaved sequence? If the receiver could correct up to one error per 4-bit word, would it be able to correct all the errors without interleaving? With interleaving?

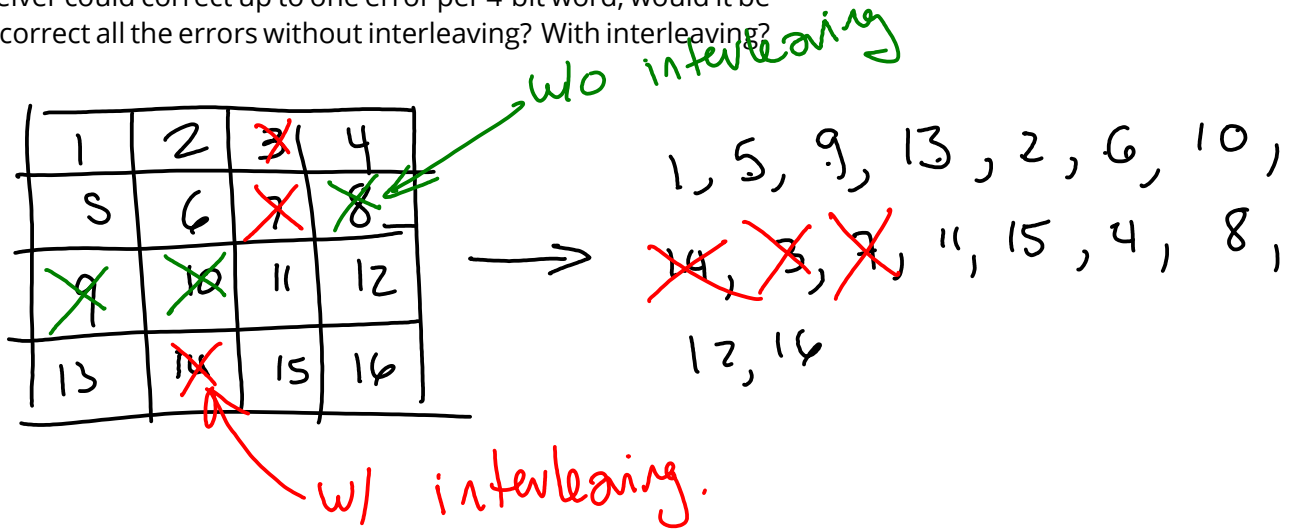

Exercise 15: If errors on the channel happened in bursts and you were using a RS code using 8-bit words, would you want to interleave bits or bytes?

bytes symbols symbols

interleave bytes → want error "packed" into bytes so all will be corrected at the same time.